


# LWM5BB-BiFi-SE-210

## PERC-Mono-crystalline Silicon Bifacial Solar Cell

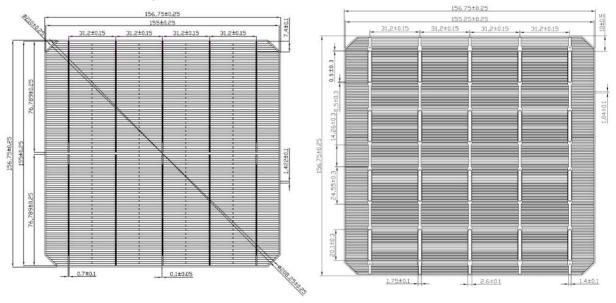

#### **Product Features >**


Dimension:	156.75mmx156.75mm±0.25mm,Φ210.0mm±0.25mm
Thickness:	190μm±20μm
Front side:	0.7mm wide bus bars,Silicon nitride anti-reflection coating
Back side:	1.75mm wide bus bars,Silicon nitride coating

## **Product Characteristics**

- > High conversion efficiency with high reliability
- > No light-induced degradation
- > Both sides can generate electricity
- Low breakage rate by using high qualified and stable wafers
- > Low mismatch of cell performance during encapsulation
- > Excellent power generation performance under low irradiation
- > Low hot spot effect

#### **Quality Control**

- > Proper inspection through incoming production, outgoing and packaging
- ➤ Efficiency tested within ± 0.1% accuracy
- > 100% checked for reverse current and visual appearance
- > Reference cell calibrated from Fraunhofer
- > ISO 9001,ISO 14001 and CE,CQC etc certificated

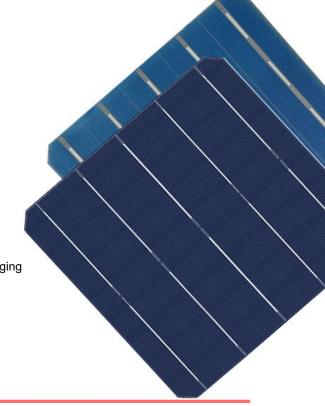



#### **Electric Performance >**

Eff(%)	Pmpp(W)	Umpp(V)	Impp(A)	Uoc(V)	Isc(A)
21.90%	5.35	0.578	9.258	0.673	9.742
21.80%	5.33	0.577	9.232	0.672	9.715
21.70%	5.30	0.576	9.201	0.671	9.675
21.60%	5.28	0.575	9.186	0.670	9.661
21.50%	5.25	0.572	9.181	0.667	9.657
21.40%	5.23	0.571	9.157	0.666	9.633
21.30%	5.20	0.569	9.149	0.665	9.611
21.20%	5.18	0.568	9.121	0.665	9.601
21.10%	5.16	0.567	9.096	0.664	9.589
21.00%	5.13	0.565	9.077	0.663	9.557
20.90%	5.11	0.564	9.060	0.662	9.531


<sup>•</sup>Under standard test condition: 1000W/ m², AM 1.5G, 25°C

#### **Temperature Coefficients >**

Current Temperature Coefficient	Tkcurrent: +0.04%/K
Voltage Temperature Coefficient	Tkvoltage: -0.32 %/K
Voltage Temperature Coefficient	Tk <sub>Power</sub> : -0.42%/K

#### IV Curve >

## Spectral Response (SR) >

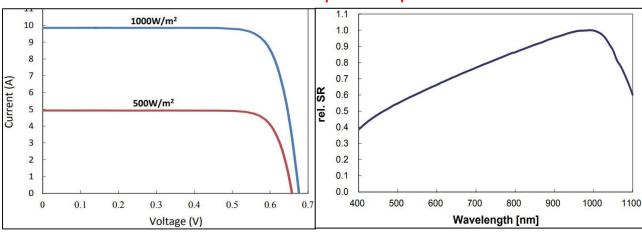

### **LIGHTWAY ENERGY TECHNOLOGY LIMITED**

 $\textbf{FAB 1:} \quad \text{Huacheng/Huifu Rd,Jintan District,Changzhou,Jiangsu,P.R.China}$ 

FAB 2: Medicine Industrial Park, Yuangzhou District, Yichun, Jiangxi, P.R. China

FAB 3: Xicheng Industrial Park, Baotian Rd, Xixiang Town, Shenzhen, P.R. China

Version 2017.10 @2017 Lightway Energy Technology Limited All rights reserved.

<sup>•</sup>Average accuracy of all tests is +/-1.5% rel