



# **LWM5BB-210**

# PERC-Mono-crystalline Silicon Solar Cell





#### **Product Features >**

Dimension:	156.75mmx156.75mm±0.25mm,Φ210.0mm±0.25mm
Thickness:	200μm±20μm
Front side:	0.7mm wide bus bars,Silicon nitride anti-reflection coating
Back side:	1.7mm wide bus bars,Silicon nitride coating

### **Product Characteristics**

- High conversion efficiency with PERC+SE technology
- No light-induced degradation
- > Uniform cell performance with stable process control
- > Low breakage rate by using high qualified and stable wafers
- > Low mismatch of cell performance during encapsulation
- Excellent power generation performance under low irradiation

## **Quality Control**

- Proper inspection through incoming production, outgoing and packaging
- ➤ Efficiency tested within ± 0.1% accuracy
- > 100% checked for reverse current and visual appearance
- > Reference cell calibrated from Fraunhofer
- > ISO 9001,ISO 14001 and CE,CQC certificated





#### **Electric Performance >**

Eff(%)	Pmpp(W)	Umpp(V)	Impp(A)	Uoc(V)	Isc(A)
22.10%	5.40	0.575	9.401	0.671	9.873
22.00%	5.38	0.573	9.393	0.670	9.861
21.90%	5.35	0.571	9.367	0.668	9.849
21.80%	5.33	0.570	9.350	0.667	9.840
21.70%	5.30	0.568	9.325	0.666	9.817
21.60%	5.28	0.567	9.305	0.665	9.792
21.50%	5.25	0.565	9.297	0.663	9.790
21.40%	5.23	0.563	9.295	0.661	9.777
21.30%	5.20	0.561	9.270	0.659	9.760
21.20%	5.18	0.560	9.259	0.658	9.758
21.10%	5.16	0.558	9.232	0.657	9.740


<sup>•</sup>Under standard test condition: 1000W/ m², AM 1.5G, 25°C

### **Temperature Coefficients >**

Current Temperature Coefficient	Tkcurrent: +0.04%/K
Voltage Temperature Coefficient	Tk <sub>Voltage</sub> : -0.31 %/K
Power Temperature Coefficient	Tk <sub>Power</sub> : -0.41%/K

#### IV Curve >

# Spectral Response (SR) >

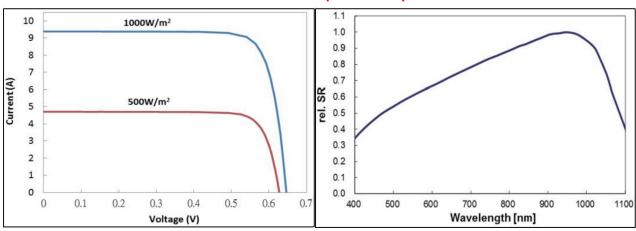

# LIGHTWAY ENERGY TECHNOLOGY LIMITED

FAB 1: Huacheng/Huifu Rd, Jintan District, Changzhou, Jiangsu, P.R. China

FAB 2: Medicine Industrial Park, Yuangzhou District, Yichun, Jiangxi, P.R. China

FAB 3: Xicheng Industrial Park, Baotian Rd, Xixiang Town, Shenzhen, P.R. China

Version 2018.06 @2018 Lightway Energy Technology Limited All rights reserved.

<sup>•</sup>Average accuracy of all tests is +/-1.5% rel